
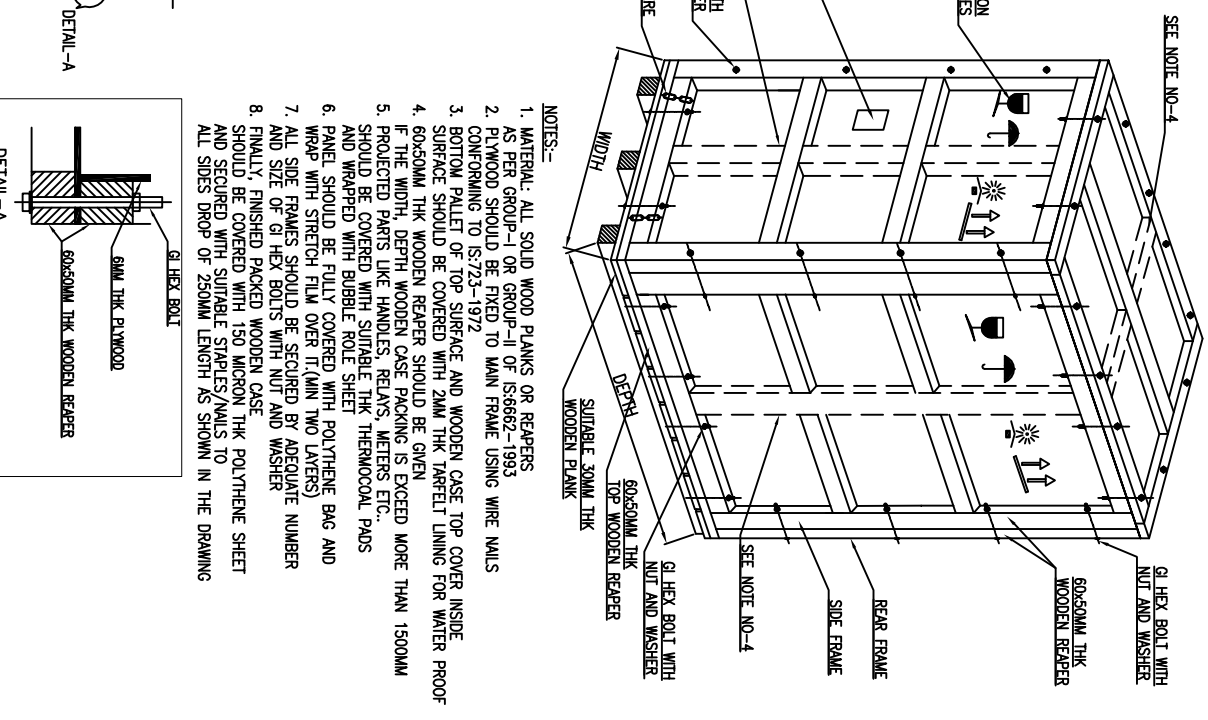


DRG. NO. EP-3-PP-001-001

INVENTORY NO.

| REV. NO. | DATE | DESCRIPTION | BY | APPD. | APPROVED | NAME | SIGN. | DATE |
|----------|------|-------------|----|-------|----------|----------|-------|----------|
| 07 | | | | | | | | |
| 06 | | | | | | | | |
| 05 | | | | | | DESIGNED | S.SUR | 01.10.15 |
| 04 | | | | | | DRAWN | | |
| 03 | | | | | | CHECKED | S.SUR | 01.10.15 |
| 02 | | | | | | | | |
| 01 | | | | | | | | |

NOT TO SCALE
ASK DOUBT IF ANY

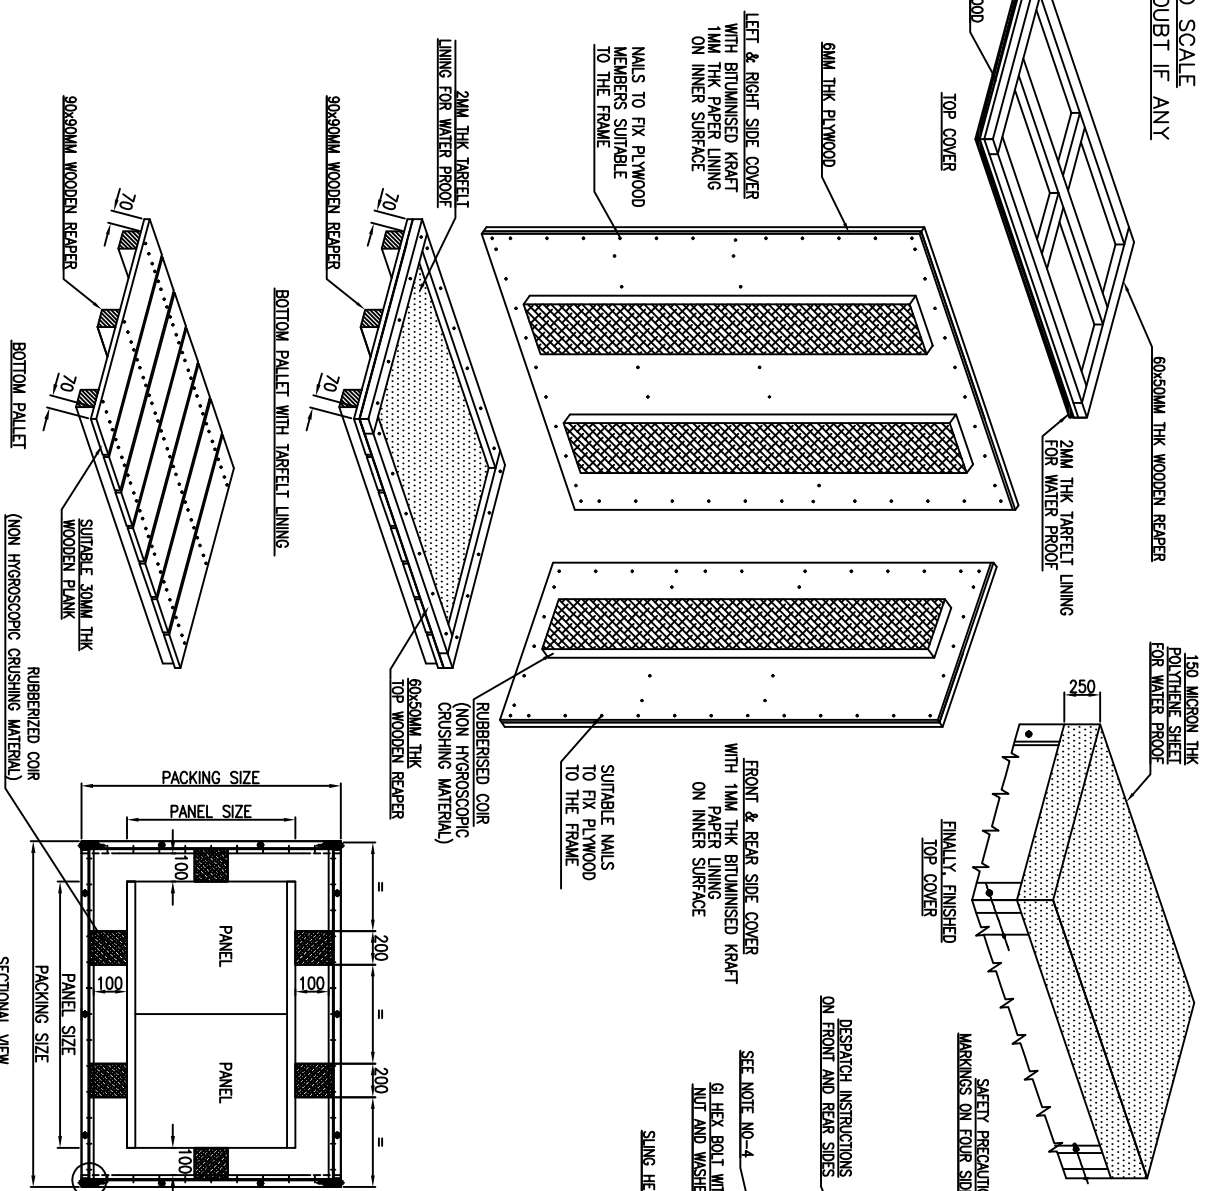

NOTES:-

1. MATERIAL: ALL SOLID WOOD PLANKS OR REAPERS AS PER GROUP-I OR GROUP-II OF IS:6662-1993
2. PLYWOOD SHOULD BE FIXED TO MAIN FRAME USING WIRE NAILS
3. CONFORMING TO IS:723-1972
4. BOTTOM PALLET OF TOP SURFACE AND WOODEN CASE TOP COVER INSIDE SURFACE SHOULD BE COVERED WITH 2MM THK TARFELT LINING FOR WATER PROOF
5. 60X90MM THK WOODEN REAPER SHOULD BE GIVEN
6. IF THE WIDTH, DEPTH WOODEN CASE PACKING IS EXCEED MORE THAN 1500MM SHOULD BE COVERED WITH SUITABLE THK THERMOCOAL PADS AND WRAPPED WITH BUBBLE SHEET
7. PANEL SHOULD BE FULLY COVERED WITH POLYTHENE BAG AND WRAP WITH STRETCH FILM OVER IT (MIN TWO LAYERS)
8. ALL SIDE FRAMES SHOULD BE SECURED BY ADOQUATE NUMBER AND SIZE OF 61 HEX BOLTS WITH NUT AND WASHER
9. FINALLY, FINISHED PACKED WOODEN CASE SHOULD BE COVERED WITH 150 MICRON THK POLYTHENE SHEET AND SECURED WITH SUITABLE STAPLES/NAIIS TO ALL SIDES DROP OF 250MM LENGTH AS SHOWN IN THE DRAWING



BHARAT HEAVY ELECTRICALS LIMITED
ELECTROREGRULIN DIVISION, BANGALORE

NO. OF SHEETS: 01
SHEET NO.: 01